



Double Incline Conveyor

Designed to meet high sanitation standard, the AMF Double Incline Conveyor elevates a variety of dough from a Dough Chunker or a Dough Pump to overhead dough transfer conveyors.

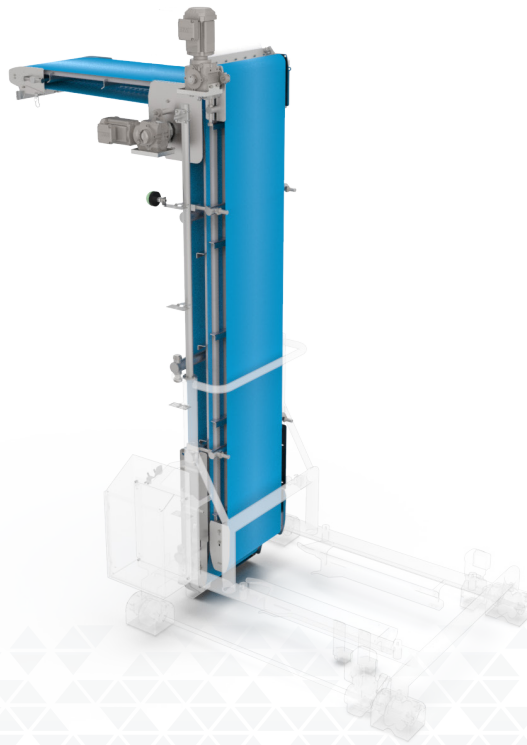

DESIGN INNOVATIONS

AMF's Double Incline Conveyor designed with maximum accessibility enables a fast and optimal cleaning process. Unmatched reliability in combination with a Dough Chunker or Dough Pump provides a small and, efficient footprint for dough transfer including breads, rolls, buns, flour tortillas, bagel, pizza dough and English muffins. Available as a standalone portable or fixed 75° as well as incline or traveling 90° to suit upstream equipment and bakery layout.

SANITATION

The dual pivot feature of the two incline conveyors allows easy access to the interior of the belt for fast and optimal cleaning.

SIMPLICITY


A zero pretension drive system and a blue polyurethane center driven belting with self-tracking capabilities gently transfer dough stress-free. No operator adjustments and minimal maintenance required.

PERFORMANCE

Designed with heavy-duty round tubing and reliable direct drive motors ensuring high performance and years of trouble-free operation. Featured with a pulsation control system to maintain the current dough positioning between incline conveyors preventing dough from falling in the event of a downstream interruption.

SAFETY

Stainless steel guarding at all pinch point areas providing optimal operator safety. Latch system interlocked to equipment ensures injury-free operation.

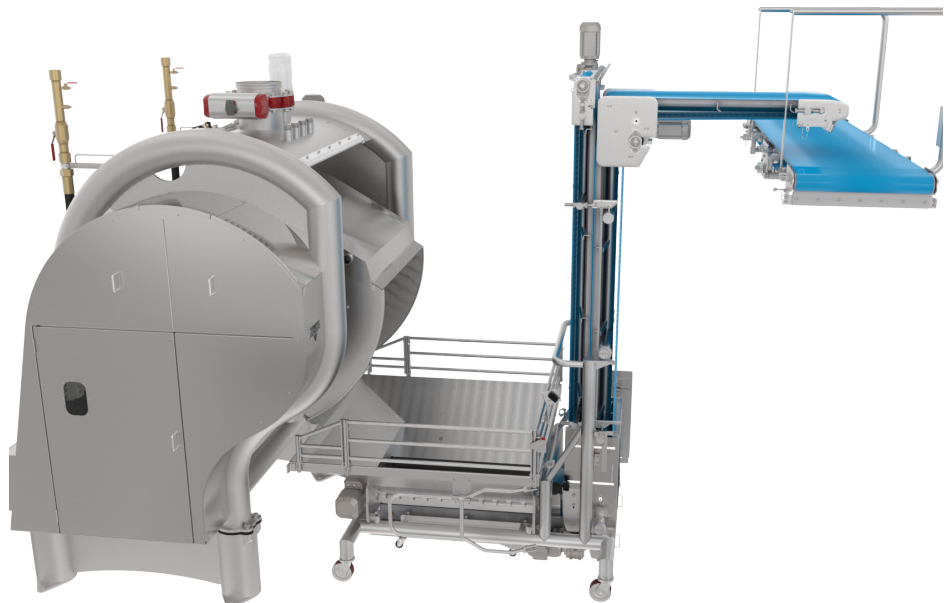


Double Incline Conveyor shown with Moveable Dough Chunker, Dough Transfer Conveyor and Open Frame Mixer


Designed With Sanitation In Mind

OTHER ADVANTAGES

- ▼ Conveyor drives use zero pretension system.
- ▼ Quick release hinge scraper for optimal cleaning.
- ▼ Double pivot feature allows clear access to the interior and exterior conveyor surfaces for efficient sanitation.
- ▼ Designed with minimal disassembly for belt removal.
- ▼ Drive located away from product zones.
- ▼ Designed with only four bearings for low maintenance.
- ▼ Corner driven blue polyurethane belting provides exceptional dough release characteristics.
- ▼ Corner driven belt design provides self-tracking.
- ▼ Large heavy-duty casters for easy mobility on standalone elevator frame.
- ▼ Integrated Dough Chunker or Dough Pump structure provides a small, efficient footprint.

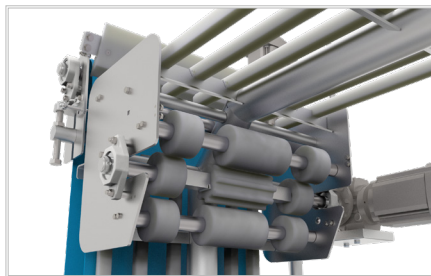

Zero Pretension System

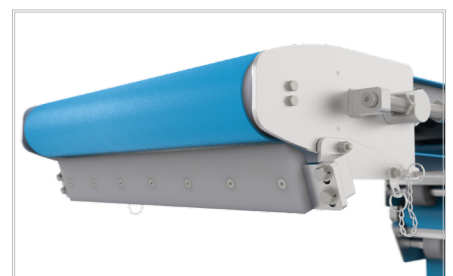

Quick Release Hinge Scraper



Dual Pivot Feature



Minimal Belt Removal Disassembly

SPECIFICATIONS



Standalone Portable 75° Incline



Standalone Fixed 75° Incline



Traveling 90° Incline



AMF IS A MARKEL FOOD GROUP COMPANY

AMF's focus on continuous improvement may result in changes to machinery specifications without notice.

07.2023